


CONTROL CENTER PARTS

LOAD SIDE SERIES

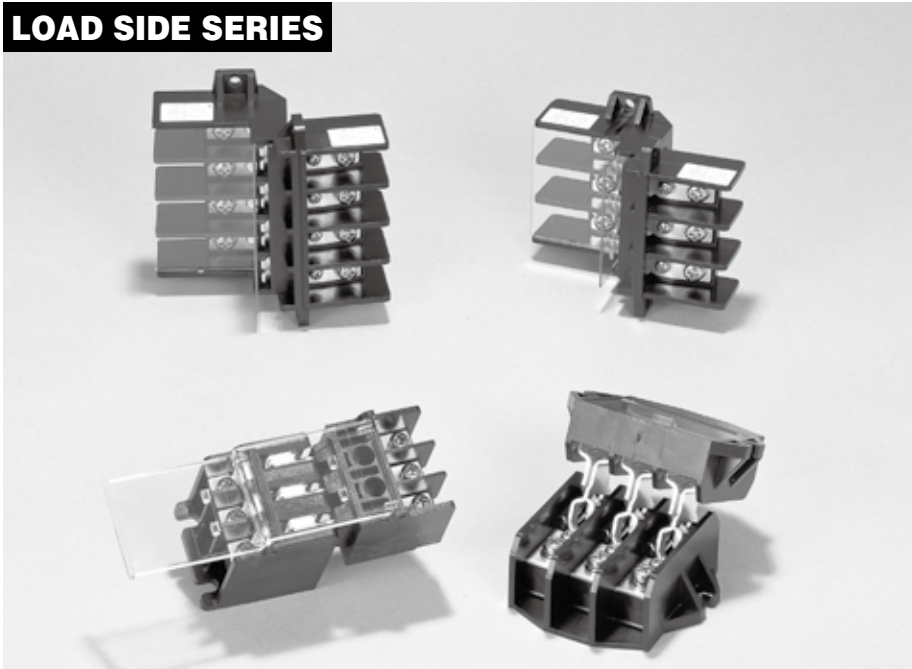

SPECIFICATION

Basic type Specification	LJ	MEJA		SJ
Type	LJ-80P LJ-80T	MEJA-125P MEJA-125C MEJA-225P MEJA-225C	MEJA-125P4 MEJA-125C4 MEJA-225P4 MEJA-225C4	SJ-100P SJ-100C
Rated insulation voltage (Ui)	600V			
Rated current-carrying capacity (Ith)	100A	125A 225A		100A
Number of poles	3-poles	3-poles	4-poles	3-poles
Screw size	M6x12	125P.C 225P.C	M6x15 M8x16	M5x10
Rated withstand voltage	3,000V AC / 1 min.			
Lightning impulse	±10kV / 3 times for each pole (1.2 / 50 µs)			
Operating temperature	-25 to 50°C			
Storing temperature	-40 to 85°C			
Altitude	2,000 m max.			

A SWITCH

B PILOT LAMP &
INDICATOR

C CONNECTING
DEVICES

D ELECTRONIC
DEVICES

E CONTROL
CENTER PARTS

CONTROL CENTER PARTS

HOW TO ORDER

●Tropical versions are custom-made products.

SJ-100 P Moisture resistance

Basic type · Current

Basic type		Current
LJ	LJ-80P	100A
	LJ-80T	
MEJA	MEJA-125P	125A
	MEJA-125C	
	MEJA-225P	225A
	MEJA-225C	
	MEJA-125P4	125A
	MEJA-125C4	
MEJA-225P4	225A	
MEJA-225C4		
SJ	SJ-100P	100A
	SJ-100C	

Tropical version (custom-made)

Terminal screws are made of stainless steel.

Connection type

Code	Connection
P	Plug (Control Center unit side)
T	Terminal (Panel side)
C	Clip (Panel side)

* Contact us for using lubricant at contacting parts.



LOAD SIDE SERIES (PRIMARY LOAD DISCONNECT DEVICE)

MEJA TYPE

The MEJA series have been designed taking account of the insertion and connection directions for disconnecting portion.

The MEJA series improves the efficiency in the unit and contributes to increased compactness.

FEATURES

■Efficient design

The MEJA series is designed as being connected to the lateral side of the unit.

It complies with the request for downsizing control center.

The connection positions are indicated taking account of the work efficiency. This allows wiring to be carried out easily.

SPECIFICATIONS (RATINGS, PERFORMANCE)

Type	MEJA-125P (Plug)	MEJA-125C (Clip)	MEJA-125P4 (Plug)	MEJA-125C4 (Clip)	MEJA-225P (Plug)	MEJA-225C (Clip)	MEJA-225P4 (Plug)	MEJA-225C4 (Clip)
Rated insulation voltage (Ui)	600V				600V			
Rated current-carrying capacity (Ith)	125A				225A			
Weight	100g	160g	130g	210g	215g	300g	280g	415g

STANDARD PRODUCTS


MEJA-125P (Plug) MEJA-125C (Clip)



MEJA-125C



MEJA-125P

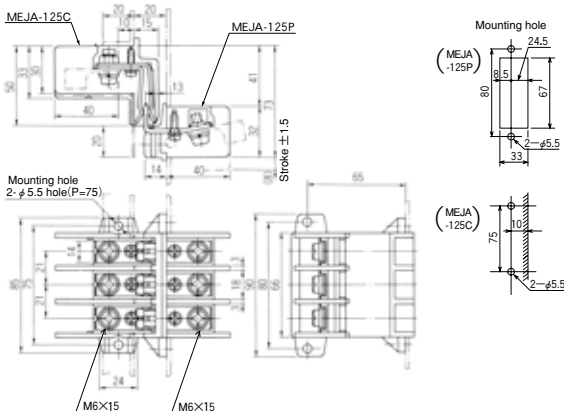

CONTROL CENTER PARTS

STANDARD PRODUCTS




MEJA-125P4 (Plug for 4 poles)
MEJA-125C4 (Clip for 4 poles)



MEJA-125C4



MEJA-125P4

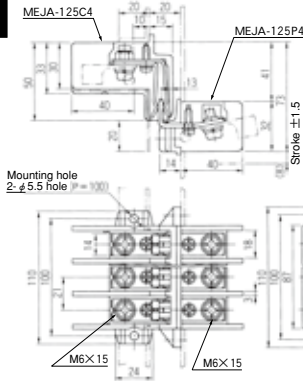




MEJA-225P (Plug for 4 poles)
MEJA-225C (Clip for 4 poles)



MEJA-225C



MEJA-225P

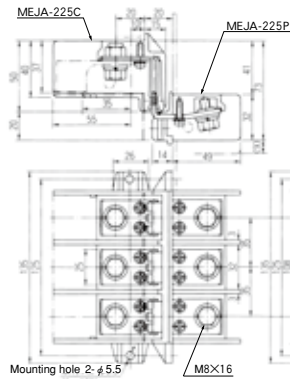




MEJA-225P4 (Plug for 4 poles)
MEJA-225C4 (Clip for 4 poles)



MEJA-225C4



MEJA-225P4

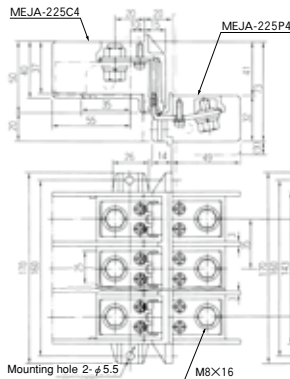

A SWITCH

B PILOT LAMP & INDICATOR

C CONNECTING DEVICES

D ELECTRONIC DEVICES

E CONTROL CENTER PARTS