

LINE SIDE SERIES (PRIMARY POWER DISCONNECT DEVICE)

HJ TYPE, HCJ TYPE

This is a high insulative protection type of which clips are enclosed with housing.

FEATURES

■ Protective structure for live part

The clip is provided with insulation protection, thereby it greatly improves safety and reliability.

B / BL type

The HJ series is a back connection type including the HCJ series that is an insulation protection type of the CJ series. It is classified into 2 types, type B for busbar thickness of 5 to 6 mm and type BL for 3 to 4 mm. Each type is available in 2 models for current of 125A and 250 A. Each model has a 4-pole version. Thus, a total of 12 models is available for selection.



SPECIFICATIONS (RATINGS, PERFORMANCE)


Type	HJ -125B	HJ -125BL	HJ -125B4	HJ -125BL4	HJ -250B	HJ -250BL	HJ -250B4	HJ -250BL4	HCJ -125B	HCJ -125BL	HCJ -125B4	HCJ -125BL4
Rated insulation voltage (Ui)	600V				600V				600V			
Rated current-carrying capacity (Ith)	125A				250A				125A			
Bus thickness	5 to 6mm	3 to 4mm	5 to 6mm	3 to 4mm	5 to 6mm	3 to 4mm	5 to 6mm	3 to 4mm	5 to 6mm	3 to 4mm	5 to 6mm	3 to 4mm
Product weight	520g		700g		610g		810g		465g		620g	

STANDARD PRODUCTS

HJ-125B (for 5 to 6mm) HJ-125BL (for 3 to 4mm)

– Back connection type –

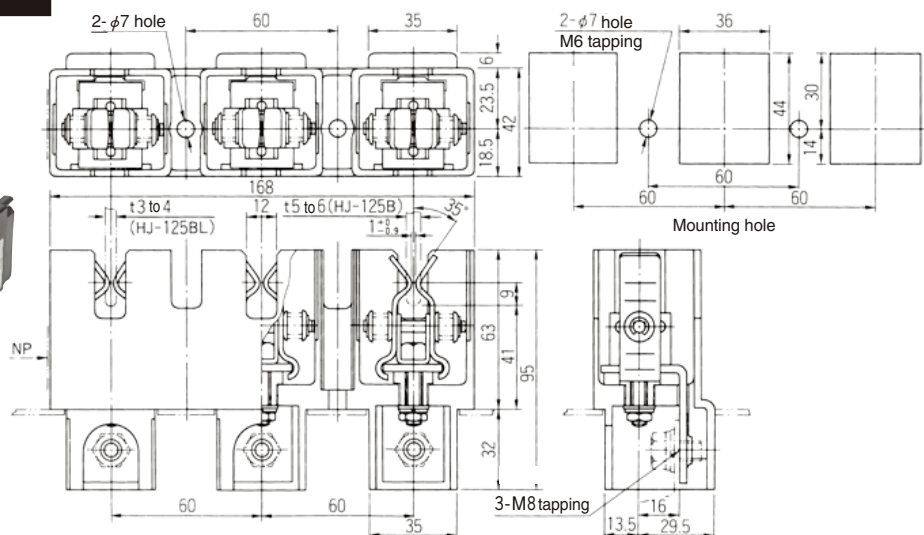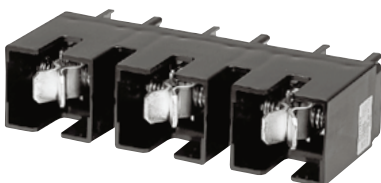



LINE SIDE SERIES (PRIMARY POWER DISCONNECT DEVICE)



HJ TYPE, HCJ TYPE

STANDARD PRODUCTS

HJ-125B4 (for 5 to 6mm)
HJ-125BL4 (for 3 to 4mm)



– Back connection type –

4-poles

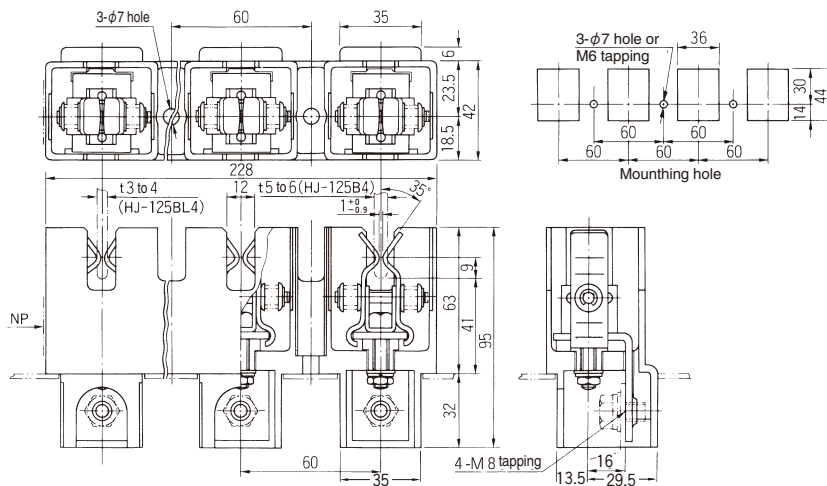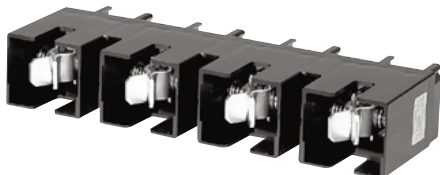

HJ-250B (for 5 to 6mm)
HJ-250BL (for 3 to 4mm)



– Back connection type –

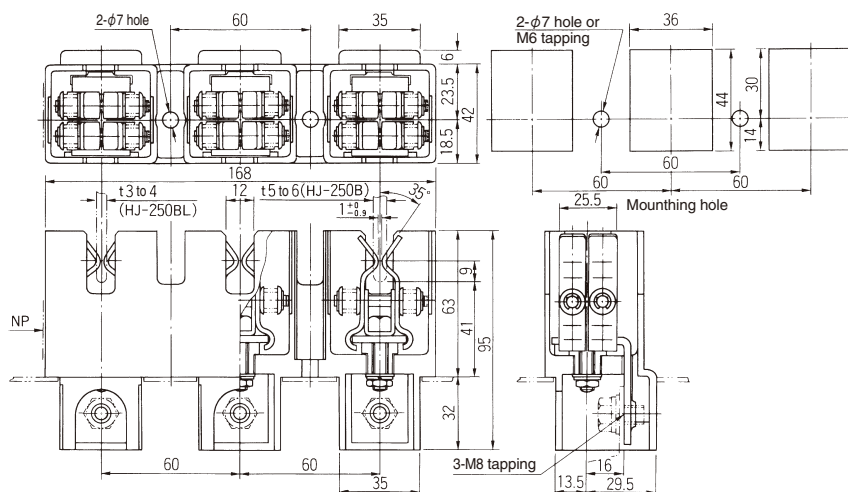

HJ-250B4 (for 5 to 6mm)
HJ-250BL4 (for 3 to 4mm)



– Back connection type –

4-poles

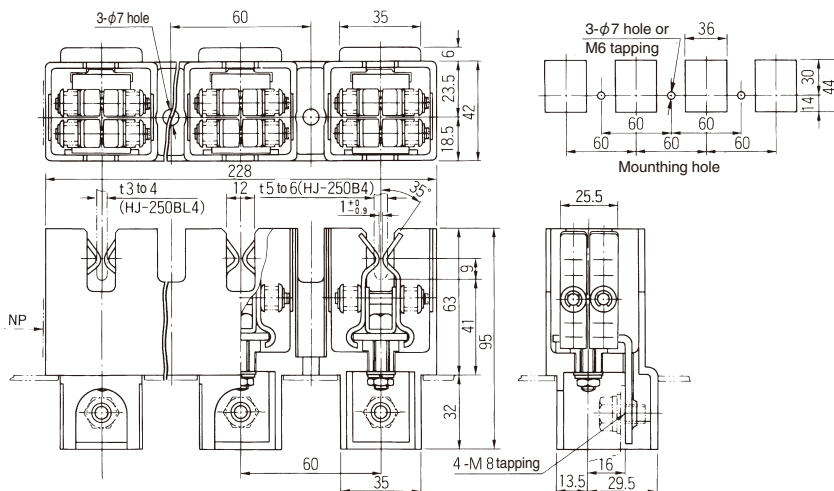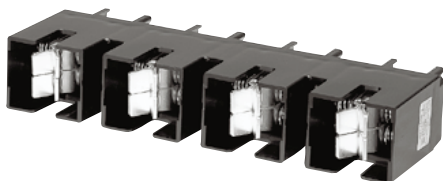

HCJ-125B (for 5 to 6mm) HCJ-125BL (for 3 to 4mm)

– Back connection type –

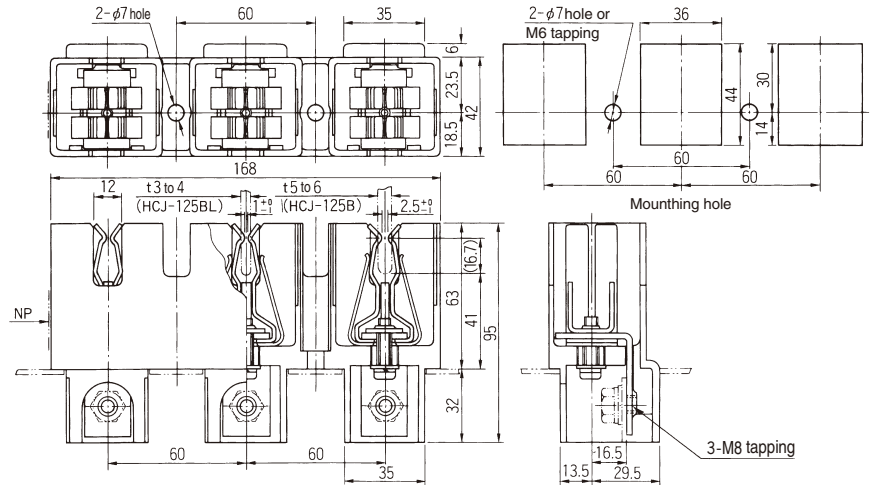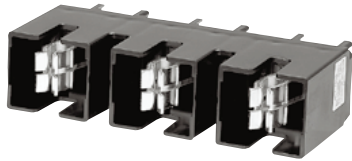

HCJ-125B4 (for 5 to 6mm) HCJ-125BL4 (for 3 to 4mm)

– Back connection type –

4-poles

