



CAM-OPERATED SWITCH

B TYPE, BH TYPE

VOLTMETER • AMMETER SWITCH

HOW TO ORDER

B-V3-HDP-B JUMPER 54-753E

Code	Switch
B	B type
BH	BH type

Type
(page A29 to 32)

Handle code
(page A6)

Color of handle / flange

Munsell color code

Code	Handle	Flange
B	N1.5	N1.5
BG	7.5BG3/3.5	7.5BG4/1.5

Code	Jumper
(Blank)	No jumper
JUMPER	With jumper

Nameplate (Page A53 to 56)

Code	Nameplate
54-	Standard (for screw fastening)
58-	For quick attachment flange

* The mark "J" shows a jumper.

STANDARD ARRANGEMENT DIAGRAM

Notice: Jumpers are not standard accessory.

If it's necessary, please instruct "with jumper".

a) For voltmeter (standard handle: HDP)

Type V3 Nameplate No. 54-753 (E)	3-phase, 3-wire, 2-PT
Type V2 Nameplate No. 54-490 (E)	3-phase, 3-wire, 2-PT
Type NV4 Nameplate No. 54-752	3-phase, 3-wire, 3-PT
Type NV3 Nameplate No. 54-751	3-phase, 3-wire, 3-PT
Type NV2E Nameplate No. 54-558	3-phase, 4-wire, 3-PT

a) For voltmeter (standard handle: HDP)

Type V2E	3-phase, 3-wire, 2-PT	
Type V5W	3-phase, 4-wire, 3-PT	
Type V4O-2	single 3-wire, 2-PT	

b) For ammeter (standard handle: HDP)

Type A2	3-phase, 3-wire, 2-CT	
Type C2	3-phase, 3-wire, 2-CT	
Type A4	3-phase, 3-wire, 3-CT	
















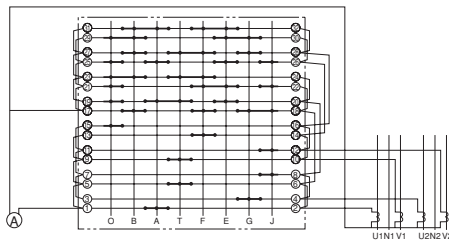
CAM-OPERATED SWITCH

B TYPE, BH TYPE

STANDARD ARRANGEMENT DIAGRAM

b) For ammeter (standard handle: HDP)

Type C4  Nameplate No. 54-495 (E)	3-phase, 3-wire, 3-CT 
Type A6  Nameplate No. 54-755 (E)	3-phase, 3-wire, 3-CT (when differential relay is used) 
Type C6  Nameplate No. 54-495 (E)	3-phase, 3-wire, 3-CT (when differential relay is used) 
Type C2E  Nameplate No. 54-555 (E)	3-phase, 3-wire, 2-CT 
Type C2H 	for change ratio of current transformation Jumper 
Type C3E  Nameplate No. 54-556 (E)	3-phase, 4-wire, 3-CT 
Type C3HT 	for change ratio of current transformation 

TypeC4E  Nameplate No. 54-555 (E)	3-phase, 3-wire, 3-CT 
TypeC3HA  Nameplate No. 54-555 (E)	single-phase, 2-line 
TypeC5E  Nameplate No. 54-555 (E)	3-phase, 3-wire, 2-CT 
TypeC6E  Nameplate No. 54-556 (E)	3-phase, 4-wire, 3-CT 
TypeC7E  Nameplate No. 54-556 (E)	3-phase, 4-wire, 3-CT 
TypeC80-2  Nameplate No. 54-556 (E)	single 3-wire, 2-CT 

* For details of nameplates, see A53 to A56 and subsequent pages.