




TEST TERMINALS


B-TYPE

STANDARD PRODUCTS

B-PTT

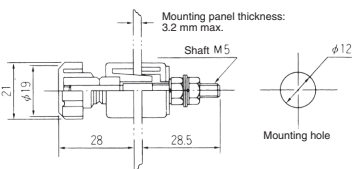


B-CTT

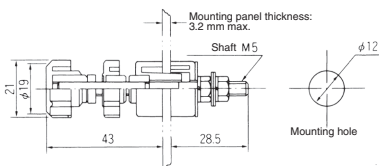

ACCESSORIES


Protective cover (Front)

●B-C Flame-retardant grade: HB



* B-C is applicable when test terminals are mounted at pitches of 40 mm.
If the B-LB short bar is mounted, B-C cannot be used.
Please contact us separately.

Color rings




Color	Model
Blue	B color ring BL
White	B color ring W
Red	B color ring R
Yellow	B color ring Y
Black	B color ring B
Green	B color ring G

(Ordering unit: 100 pieces)

Protective cover (back)


●B-CVB

Flame-retardant grade: V-2




Jumper

●B-SV




Model	Code	Munsell color
B-SV	4/1.5	7.5BG4/1.5
	3/3.5	7.5BG3/3.5
	R	7.5R4.5/14
	Y	2.5Y8/12
	B	N1.5

●B-SB



Model	Code	Munsell color
B-SB	4/1.5	7.5BG4/1.5
	3/3.5	7.5BG3/3.5
	R	7.5R4.5/14
	Y	2.5Y8/12
	B	N1.5


●B-LB




Model	Code	Munsell color
B-LB	4/1.5	7.5BG4/1.5
	3/3.5	7.5BG3/3.5
	R	7.5R4.5/14
	Y	2.5Y8/12
	B	N1 5

EXAMPLES OF CONNECTION


PTT

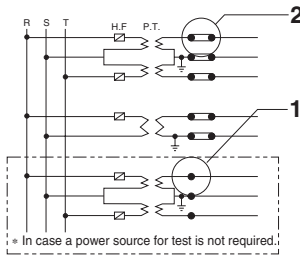



CTT

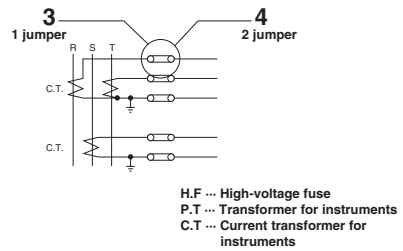

1


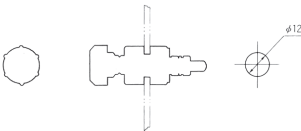


2

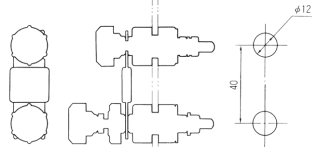

*Combinations for connecting a test power supply.

3

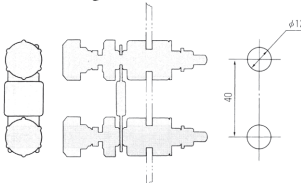

4

