



LOAD SIDE SERIES (PRIMARY LOAD DISCONNECT DEVICE)

LJ TYPE

The LJ series have been developed by pursuing compactness.
It is designed as being connected to the rear of the control center drawing unit.
Thus, the unit can be downsized or given design space to place.

FEATURES

■ Compact type




The LJ series achieves greater downsizing than the former load disconnect device, thereby contributing to space saving of the control center.

SPECIFICATIONS (RATINGS, PERFORMANCE)

Type	LJ-80P (plug)	LJ-80T (terminal)
Rated insulation voltage (Ui)	600V	
Rated current-carrying capacity (Ith)	100A	
Product Weight	150g	125g

STANDARD PRODUCTS

LJ-80P (Plug)

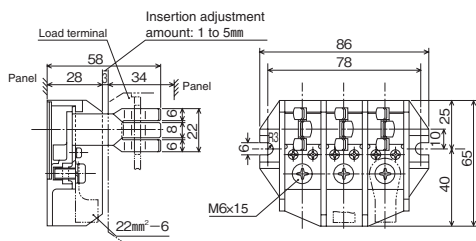

LJ-80T (Terminal)

