



FEATURES

■ Compact design

Significantly smaller than conventional load disconnect device, contributing to space saving in control centers.

■ Expansion with short bar

By connecting and wiring the terminals with dedicated short bar (sold separately), 200A and 300A can be used.

■ Two kinds of protective covers


In addition to the conventional hinge type cover, a new slide type cover has been added to the lineup. You can choose the type of cover that best suits your application and space requirements.

SPECIFICATIONS (RATINGS, PERFORMANCE)

Type	SJ-100P (Plug)	SJ-100C (Clip)
Rated insulation voltage (UI)		600V
Rated current-carrying capacity (Ith)		100A
Product weight	105g	150g

STANDARD PRODUCTS


SJ-100P (Plug)
SJ-100C (Clip)

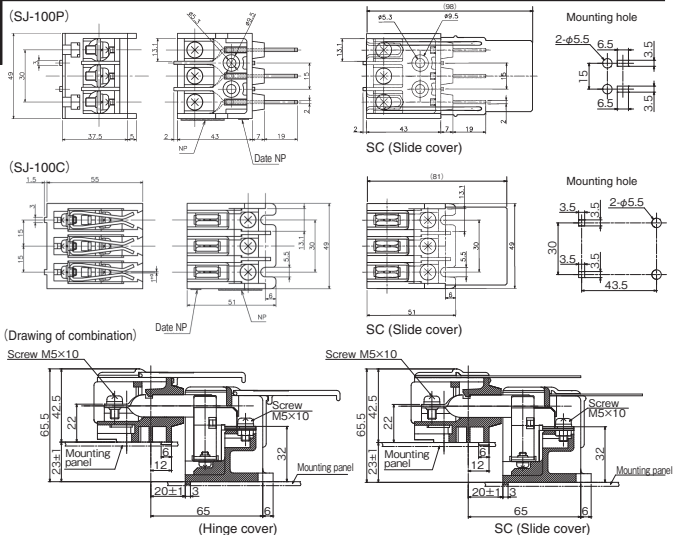


ACCESSORIES

This is an interpolar jumper as use of 100A or more.
Please contact us for how to use.

●SJ jumper 2



●SJ jumper 2S



●SJ jumper 3

