




SCREW TYPE TERMINAL BLOCK

TU TYPE



(Some models uncomfortable)

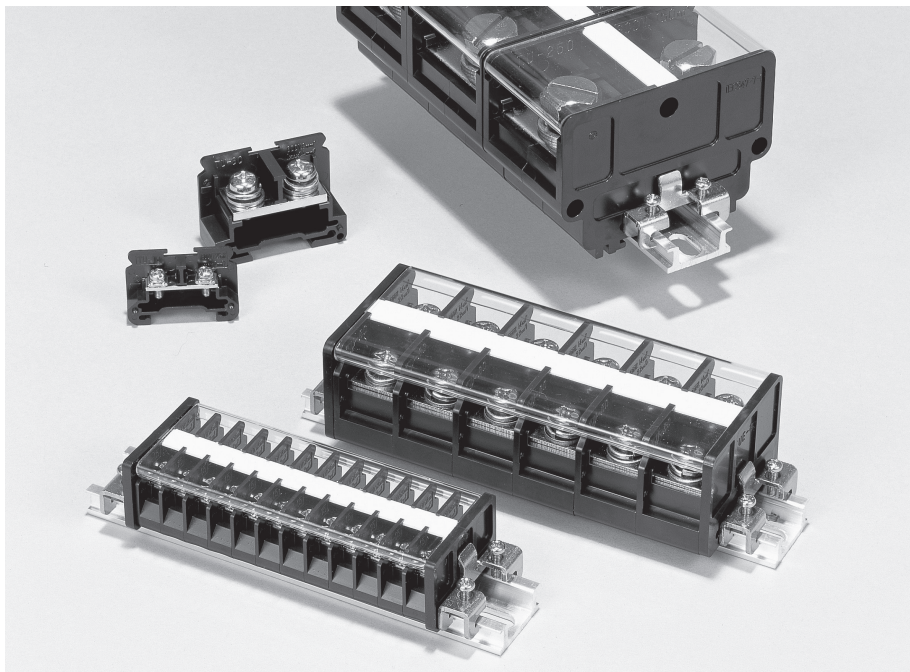

FEATURES

- Terminal block standard model with wide variations from 10 A to 60 A
- For the insulating material of the unit block and end plate, a modified PPE resin with flame retardancy grade UL94V-0 is used.
- All resin materials use virgin materials and maintain high reliability for a long time.
- In addition to miniaturizing the unit design, the screw tightening strength has been increased, weight reduction, high quality has been realized.
- Overseas standard compliant products.
- Stainless steel screw specifications are also available.

SPECIFICATIONS (RATINGS, PERFORMANCE)

Type		TU-10	TU-15	TU-15C	TU-20 TU-20BU	TU-30B TU-30BR	TU-50	TU-60	TU-80	TU-125	TU-150	TU-250	TU-400B	TU-600B	TUP-15		
Specification																	
Rated insulation voltage (Ui)	Pollution degree 2	600V	600V	1,000V	600V	1,000V									250V		
	Pollution degree 3			600V		600V											
Rated current-carrying capacity (Ith)	General specifications	10A	15A	21A	25A	30A	50A	70A	94A	132A	175A	250A	400A	600A	15A		
	IEC	16A	21A		30A	30A	50A	70A	94A	132A	175A	240A	400A	600A	—		
	UL	—		15A	—	30A	50A	80A	85A	125A	150A	250A	—	—	—		
Rated cross-section		2mm ²			5.5mm ²		8mm ²	14mm ²	22mm ²	38mm ²	60mm ²	150mm ²	200mm ²	325mm ²	2mm ²		
Screw size		M3×8	M3.5×8		M4×10		M5×10	M6×12		M8×16		M10×25	M12×30	M16×35	M3.5×8		
Number of conductors simultaneously connectable		2														—	
Power-Frequency withstand voltage		2,500V AC / 1 min.		3,000V AC / 1 min.		2,500V AC / 1 min.		3,000V AC / 1 min.				5,000V AC / 1 min.		2,500V AC / 1 min.			
Rated impulse withstand voltage		4kV		8kV		4kV		8kV				12kV		—			
Lightning impulse		3 times AC 2.5kV / pole (1.2 / 50µs)		—		2.5kV / pole (1.2 / 50µs)		—				—		±8.0kV (1.2 / 50µs)			
Ambient operating temperature		-25 to 50°C		-25 to 60°C		-25 to 50°C		-25 to 60°C								-25 to 50°C	
Storing temperature		-40 to 85°C															
Altitude		2,000 m or less															
Flame retardant grade		Unit: UL94V-0														—	


* Insulation treatment suitable for the working voltage should be applied to the crimp terminal.

* Consider with ambient operating temperature, current-carrying capacity, wire size, please use a heat-resistant wires as necessary.

How to order of terminal blocks

Product Composition

Necessary parts for assembling a terminal block

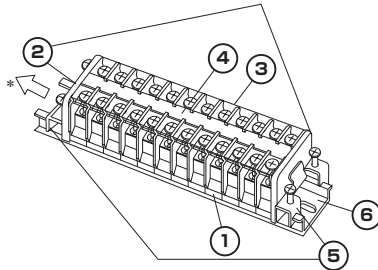

- ① Unit part ————— Refer to page C93 to C96
 - ② End plate
 - ③ Cover
(Standard length: 1,000 mm)
 - ④ Marker strip
(Standard length: 900 mm)
 - ⑤ End clamp
 - ⑥ Rail
(Standard length: 1,000 mm)
- Please check the accessory list
(page C101 to C102) and order by the
compatible type name.

Remark: When purchasing single item accessories, please pay attention to each sales unit.

* Upper side.


How to order assembly

1 One type assembly

TU-15 × 36 UD-17

Basic type No. of poles Rail

Remark: When separating by end plate, please specify separately.

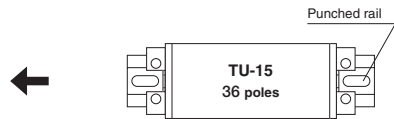


2 Mixing assembly

TU-15 × 12, TU-50 × 24 UF-475

Basic type No. of poles Type name No. of poles Rail

Remark: When combining the same dimensions, there is no separation of end plates.
Please specify separately as necessary.

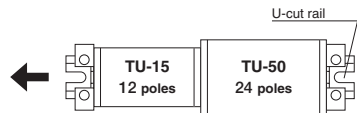

3 For stainless steel screw type (custom product)

TU-15 SUS × 36 UD-17 MR

Basic type Stainless steel screw No. of poles Rail Tropical region type

Information of tropical region type

Screw Stainless steel
Rail Varnish coated
End clamp..... Thick plated

Tropical region
type nameplate
(attached to end
plate)

MOISTURE
RESISTANCE

See page C97 to C100 for rail length
some type combination.



SCREW TYPE TERMINAL BLOCK


TU TYPE

STANDARD PRODUCTS

TU-10

General IEC
10A 16A


Applicable wire size: 0.75 to 2.0 mm² (M3)



●Applicable accessories

End plate TUE-2
Standard marker strip TUM-2
Standard rail TUB
End clamp TUL
Cover TUC-2


●Applicable crimp terminal



TU-15

General IEC
15A 21A


Applicable wire size: 0.75 to 2.0 mm² (M3.5)



●Applicable accessories

End plate TUE-2
Standard marker strip TUM-1
Standard rail TUB
End clamp TUL
Cover TUC-2


●Applicable crimp terminal



TU-15C

General IEC UL
21A 21A 15A


Applicable wire size: 0.75 to 2.0 mm² (M3.5)

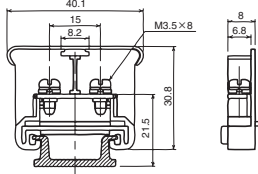

●Applicable accessories

End plate TUE-2B
Standard marker strip TUM-1
Standard rail TUB
End clamp TUL
Cover TUC-3


●Applicable crimp terminal



TU-20

General IEC
25A 30A


Applicable wire size: 0.75 to 5.5 mm² (M4)



●Applicable accessories

End plate TUE-2
Standard marker strip TUM-1
Standard rail TUB
End clamp TUL
Cover TUC-2



●Applicable crimp terminal



TU-30B

General IEC UL
30A 30A 30A


Applicable wire size: 0.75 to 5.5 mm² (M4)

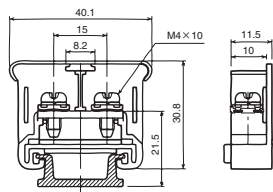

●Applicable accessories

End plate TUE-2B
Standard marker strip TUM-1
Standard rail TUB
End clamp TUL
Cover TUC-3



●Applicable crimp terminal



TU-50

General IEC UL
50A 50A 50A


Applicable wire size: 2.0 to 8 mm² (M5)

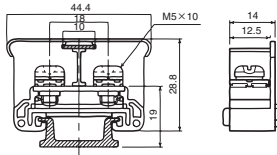

●Applicable accessories

End plate TUE-5
Standard marker strip TUM-2
Standard rail TUB
End clamp TUL
Cover TUC-6

●Applicable crimp terminal




CONNECTING DEVICES

TU-60

General IEC UL
70A 70A 80A


Applicable wire size: 3.5 to 14 mm² (M6)

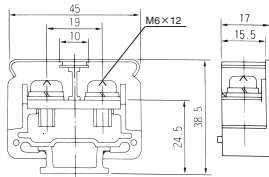

●Applicable accessories

End plate	TUE-6
Standard marker strip	TUM-2
Standard rail	TUB
End clamp	TUL
Cover	TUC-6



●Applicable crimp terminal



TU-80

General IEC UL
94A 94A 85A


Applicable wire size: 5.5 to 22 mm² (M6)

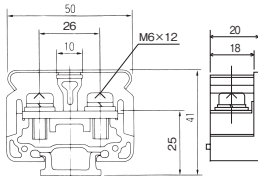

●Applicable accessories

End plate	TUE-8
Standard marker strip	TUM-2
Standard rail	TUB
End clamp	TUL
Cover	TUC-8

●Applicable crimp terminal





TU-125

General IEC UL
132A 132A 125A

Applicable wire size: 14 to 38 mm² (M8)

Applicable to DIN rail




The figures in parentheses show the dimensions as with the TUB rail assembly.

●Applicable accessories

End plate	TUE-15
Standard marker strip	TUM-2
Standard rail	TUB
End clamp	TUL
Cover	TUC-15

●Applicable crimp terminal





TU-150

General IEC UL
175A 175A 150A

Applicable wire size: 30 to 60 mm² (M8)

Applicable to DIN rail




The figures in parentheses show the dimensions as with the TUB rail assembly.

●Applicable accessories

End plate	TUE-15
Standard marker strip	TUM-2
Standard rail	TUB
End clamp	TUL
Cover	TUC-15

●Applicable crimp terminal




TU-250

General IEC UL
250A 240A 250A

Applicable wire size: 100 to 150 mm² (M10)

Applicable to DIN rail

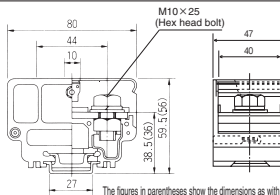


The figures in parentheses show the dimensions as with the TUB rail assembly.

●Applicable accessories

Standard marker strip	With TUM-3
Standard rail	TUB
End clamp	TUL
Cover	With TUC-25
Connecting pin	TU-4008 pin (selling separately)

●Applicable crimp terminal






SCREW TYPE TERMINAL BLOCK

TU TYPE

STANDARD PRODUCTS


TU-400B Applicable to DIN rail General 400A
Applicable wire size: 150 to 200 mm² (M12)

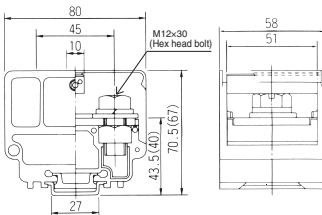

● Applicable accessories



Standard marker strip	With TUM-4
Standard rail	TUB
End clamp	TUL
Cover	With TUC-40
Connecting pin	TU-400B pin (selling separately) TU-600B pin (selling separately) (In case of with TUC-60)

● Applicable crimp terminal




⇒ With insulating cover

(For the use of crimp terminal protection)

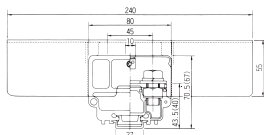


The figures in parentheses show the dimensions as with the TUB rail assemble.

(When connecting pins are used.)

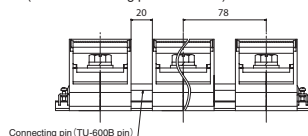


TU-600B Applicable to DIN rail General 600A
Applicable wire size: 250 to 325 mm² (M16)

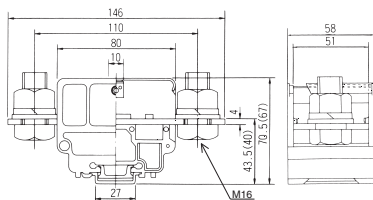

● Applicable accessories



Standard marker strip	With TUM-4
Standard rail	TUB
End clamp	TUL
Cover	With TUC-40
Connecting pin	TU-600B pin

● Applicable crimp terminal




⇒ With insulating cover

(For protection up to crimp terminal)

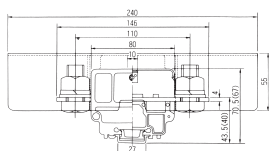

The figures in parentheses show the dimensions as with the TUB rail assemble.

(When connecting pins are used.)

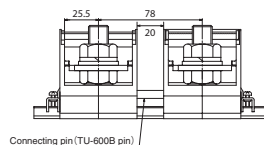



SPECIAL SPECIFICATION PRODUCTS

Wrapping terminal: Up to 4 wire-wrap wires can be connected on one side.

TUP-15

General
15A


Applicable wire size: 0.75 to 2.0 mm² (M3.5)

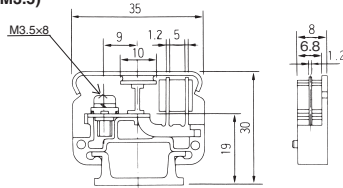

●Applicable accessories

End plate	TUE-2
Standard marker strip	TUM-2
Standard rail	TUB
End clamp	TUL
Cover	TUC-2

●Applicable crimp terminal





≡ With insulating cover

Light-blue terminal: Use for safety and explosion-proof construction.

TU-20BU

General
25A


Applicable wire size: 0.75 to 5.5 mm² (M4)

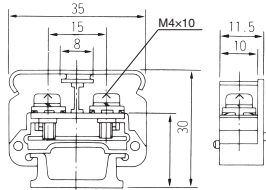

●Applicable accessories

End plate	TUE-2 (BL)
Standard marker strip	TUM-1
Standard rail	TUB
End clamp	TUL
Cover	TUC-2

●Applicable crimp terminal





≡ With insulating cover

Red terminal: Use for a trip circuit, etc.

TU-30SR

General
30A


Applicable wire size: 1.25 to 5.5 mm² (M4)

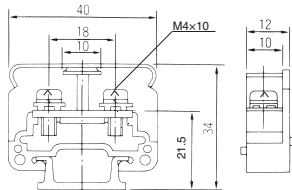

●Applicable accessories

End plate	TUE-3 (R)
Standard marker strip	TUM-2
Standard rail	TUB
End clamp	TUL
Cover	TUC-3

●Applicable crimp terminal



≡ With insulating cover




SCREW TYPE TERMINAL BLOCK

TU TYPE

TABLE OF ASSEMBLED DIMENSIONS

TU type assembly on punched rail

TUB-D type



Type	TU-10			TU-15,TU-15C,TUS-15,TUP-15			TU-20,TU-30B,30BR,20BU,TU-FSM,FS			TU-50			TU-60			Type
Pole	P	L	Rail	P	L	Rail	P	L	Rail	P	L	Rail	P	L	Rail	Pole
1	60	77	UD-4	60	77	UD-4	60	77	UD-4	60	77	UD-4	60	77	UD-4	1
2	60	77	UD-4	60	77	UD-4	60	77	UD-4	60	77	UD-4	60	77	UD-4	2
3	60	77	UD-4	60	77	UD-4	60	77	UD-4	80	97	UD-5	80	97	UD-5	3
4	60	77	UD-4	60	77	UD-4	80	97	UD-5	80	97	UD-5	100	117	UD-6	4
5	60	77	UD-4	60	77	UD-4	80	97	UD-5	100	117	UD-6	120	137	UD-7	5
6	60	77	UD-4	80	97	UD-5	100	117	UD-6	100	117	UD-6	120	137	UD-7	6
7	80	97	UD-5	80	97	UD-5	100	117	UD-6	120	137	UD-7	140	157	UD-8	7
8	80	97	UD-5	100	117	UD-6	120	137	UD-7	140	157	UD-8	160	177	UD-9	8
9	80	97	UD-5	100	117	UD-6	140	157	UD-8	160	177	UD-9	180	197	UD-10	9
10	100	117	UD-6	100	117	UD-6	140	157	UD-8	160	177	UD-9	200	217	UD-11	10
11	100	117	UD-6	120	137	UD-7	160	177	UD-9	180	197	UD-10	220	237	UD-12	11
12	100	117	UD-6	120	137	UD-7	160	177	UD-9	200	217	UD-11	240	257	UD-13	12
13	120	137	UD-7	140	157	UD-8	180	197	UD-10	220	237	UD-12	240	257	UD-13	13
14	120	137	UD-7	140	157	UD-8	180	197	UD-10	220	237	UD-12	260	277	UD-14	14
15	120	137	UD-7	140	157	UD-8	200	217	UD-11	240	257	UD-13	280	297	UD-15	15
16	140	157	UD-8	160	177	UD-9	220	237	UD-12	260	277	UD-14	300	317	UD-16	16
17	140	157	UD-8	160	177	UD-9	220	237	UD-12	260	277	UD-14	320	337	UD-17	17
18	140	157	UD-8	180	197	UD-10	240	257	UD-13	280	297	UD-15	340	357	UD-18	18
19	160	177	UD-9	180	197	UD-10	240	257	UD-13	300	317	UD-16	360	377	UD-19	19
20	160	177	UD-9	180	197	UD-10	260	277	UD-14	300	317	UD-16	360	377	UD-19	20
21	180	197	UD-10	200	217	UD-11	280	297	UD-15	320	337	UD-17	380	397	UD-20	21
22	180	197	UD-10	200	217	UD-11	280	297	UD-15	340	357	UD-18	400	417	UD-21	22
23	180	197	UD-10	220	237	UD-12	300	317	UD-16	360	377	UD-19	420	437	UD-22	23
24	200	217	UD-11	220	237	UD-12	300	317	UD-16	360	377	UD-19	440	457	UD-23	24
25	200	217	UD-11	220	237	UD-12	320	337	UD-17	380	397	UD-20	460	477	UD-24	25
26	200	217	UD-11	240	257	UD-13	320	337	UD-17	400	417	UD-21	480	497	UD-25	26
27	220	237	UD-12	240	257	UD-13	340	357	UD-18	400	417	UD-21	480	497	UD-25	27
28	220	237	UD-12	260	277	UD-14	360	377	UD-19	420	437	UD-22	500	517	UD-26	28
29	220	237	UD-12	260	277	UD-14	360	377	UD-19	440	457	UD-23	520	537	UD-27	29
30	240	257	UD-13	260	277	UD-14	380	397	UD-20	460	477	UD-24	540	557	UD-28	30
31	240	257	UD-13	280	297	UD-15	380	397	UD-20	460	477	UD-24	560	577	UD-29	31
32	240	257	UD-13	280	297	UD-15	400	417	UD-21	480	497	UD-25	580	597	UD-30	32
33	260	277	UD-14	300	317	UD-16	420	437	UD-22	500	517	UD-26				33
34	260	277	UD-14	300	317	UD-16	420	437	UD-22	500	517	UD-26				34
35	260	277	UD-14	300	317	UD-16	440	457	UD-23	520	537	UD-27				35
36	280	297	UD-15	320	337	UD-17	440	457	UD-23	540	557	UD-28				36
37	280	297	UD-15	320	337	UD-17	460	477	UD-24	560	577	UD-29				37
38	280	297	UD-15	340	357	UD-18	460	477	UD-24	560	577	UD-29				38
39	300	317	UD-16	340	357	UD-18	480	497	UD-25	580	597	UD-30				39
40	300	317	UD-16	340	357	UD-18	500	517	UD-26							40
41	320	337	UD-17	360	377	UD-19	500	517	UD-26							41
42	320	337	UD-17	360	377	UD-19	520	537	UD-27							42
43	320	337	UD-17	380	397	UD-20	520	537	UD-27							43
44	340	357	UD-18	380	397	UD-20	540	557	UD-28							44
45	340	357	UD-18	380	397	UD-20	540	557	UD-28							45
46	340	357	UD-18	400	417	UD-21	560	577	UD-29							46
47	360	377	UD-19	400	417	UD-21	560	577	UD-29							47
48	360	377	UD-19	420	437	UD-22	580	597	UD-30							48
49	360	377	UD-19	420	437	UD-22										49
50	380	397	UD-20	420	437	UD-22										50
51	380	397	UD-20	440	457	UD-23										51
52	380	397	UD-20	440	457	UD-23										52
53	400	417	UD-21	460	477	UD-24										53
54	400	417	UD-21	460	477	UD-24										54
55	400	417	UD-21	460	477	UD-24										55
56	420	437	UD-22	480	497	UD-25										56
57	420	437	UD-22	480	497	UD-25										57
58	440	457	UD-23	500	517	UD-26										58
59	440	457	UD-23	500	517	UD-26										59
60	440	457	UD-23	500	517	UD-26										60

*Rail designation is UD-[pole] for TUB-D type (Punched rail).

CONNECTING DEVICES

A SWITCH

B PILOT LAMP & INDICATOR

C CONNECTING DEVICES

D ELECTRONIC DEVICES

Type	TU-80			TU-125			TU-150			TU-250			TU-400B			Type
Pole	P	L	Rail	P	L	Rail	P	L	Rail	P	L	Rail	P	L	Rail	Pole
1	60	77	UD-4	60	77	UD-4	60	77	UD-4	60	77	UD-4	80	97	UD-5	1
2	60	77	UD-4	80	97	UD-5	80	97	UD-5	120	137	UD-7	140	157	UD-8	2
3	80	97	UD-5	100	117	UD-6	120	137	UD-7	160	177	UD-9	200	217	UD-11	3
4	100	117	UD-6	120	137	UD-7	140	157	UD-8	200	217	UD-11	260	277	UD-14	4
5	120	137	UD-7	140	157	UD-8	180	197	UD-10	260	277	UD-14	320	337	UD-17	5
6	140	157	UD-8	180	197	UD-10	200	217	UD-11	300	317	UD-16	360	377	UD-19	6
7	160	177	UD-9	200	217	UD-11	240	257	UD-13	360	377	UD-19	420	437	UD-22	7
8	180	197	UD-10	220	237	UD-12	260	277	UD-14	400	417	UD-21	480	497	UD-25	8
9	200	217	UD-11	260	277	UD-14	300	317	UD-16	440	457	UD-23	540	557	UD-28	9
10	220	237	UD-12	280	297	UD-15	320	337	UD-17	500	517	UD-26				10
11	240	257	UD-13	300	317	UD-16	360	377	UD-19	540	557	UD-28				11
12	260	277	UD-14	340	357	UD-18	380	397	UD-20	580	597	UD-30				12
13	280	297	UD-15	360	377	UD-19	400	417	UD-21							13
14	300	317	UD-16	380	397	UD-20	440	457	UD-23							14
15	320	337	UD-17	400	417	UD-21	480	497	UD-25							15
16	340	357	UD-18	440	457	UD-23	500	517	UD-26							16
17	360	377	UD-19	460	477	UD-24	540	557	UD-28							17
18	380	397	UD-20	480	497	UD-25	560	577	UD-29							18
19	400	417	UD-21	500	517	UD-26										19
20	420	437	UD-22	540	557	UD-28										20
21	440	457	UD-23	560	577	UD-29										21
22	460	477	UD-24	580	597	UD-30										22
23	480	497	UD-25													23
24	500	517	UD-26													24
25	520	537	UD-27													25
26	540	557	UD-28													26
27	560	577	UD-29													27
28	580	597	UD-30													28

*When the TU-400B is equipped with the TUC-60 cover, the maximum number of terminals that can be assembled is 7.

Type	TU-600B															Type
Pole	P	L	Rail													Pole
1	80	97	UD-5													1
2	160	177	UD-9													2
3	240	257	UD-13													3
4	320	337	UD-17													4
5	400	417	UD-21													5
6	480	497	UD-25													6
7	560	577	UD-29													7

*Rail designation is UD-[pole] for TUB-D type (Punched rail).




SCREW TYPE TERMINAL BLOCK

TU TYPE

TABLE OF ASSEMBLED DIMENSIONS

TU type assembly on punched rail

TUB-F type

Type Pole	TU-10			TU-15, TU-15C, TUS-15, TUP-15			TU-20, TU-30B, 30BR, 20BU, TU-FSM, FS			TU-50			TU-60			Type Pole
	P	L	Rail	P	L	Rail	P	L	Rail	P	L	Rail	P	L	Rail	
1	35	45	UF-45	35	45	UF-45	35	45	UF-45	40	50	UF-50	40	50	UF-50	1
2	40	50	UF-50	40	50	UF-50	50	60	UF-60	55	65	UF-65	60	70	UF-70	2
3	50	60	UF-60	50	60	UF-60	60	70	UF-70	70	80	UF-80	75	85	UF-85	3
4	55	65	UF-65	55	65	UF-65	70	80	UF-80	80	90	UF-90	95	105	UF-105	4
5	65	75	UF-75	65	75	UF-75	85	95	UF-95	95	105	UF-105	110	120	UF-120	5
6	70	80	UF-80	70	80	UF-80	95	105	UF-105	110	120	UF-120	125	135	UF-135	6
7	75	85	UF-85	80	90	UF-90	105	115	UF-115	125	135	UF-135	145	155	UF-155	7
8	85	95	UF-95	90	100	UF-100	115	125	UF-125	140	150	UF-150	160	170	UF-170	8
9	90	100	UF-100	95	105	UF-105	130	140	UF-140	150	160	UF-160	180	190	UF-190	9
10	100	110	UF-110	105	115	UF-115	140	150	UF-150	165	175	UF-175	195	205	UF-205	10
11	105	115	UF-115	110	120	UF-120	155	165	UF-165	180	190	UF-190	215	225	UF-225	11
12	110	120	UF-120	120	130	UF-130	165	175	UF-175	195	205	UF-205	230	240	UF-240	12
13	120	130	UF-130	130	140	UF-140	175	185	UF-185	205	215	UF-215	245	255	UF-255	13
14	125	135	UF-135	135	145	UF-145	185	195	UF-195	220	230	UF-230	265	275	UF-275	14
15	135	145	UF-145	145	155	UF-155	200	210	UF-210	235	245	UF-245	280	290	UF-290	15
16	140	150	UF-150	150	160	UF-160	210	220	UF-220	250	260	UF-260	300	310	UF-310	16
17	145	155	UF-155	160	170	UF-170	220	230	UF-230	265	275	UF-275	315	325	UF-325	17
18	155	165	UF-165	170	180	UF-180	235	245	UF-245	275	285	UF-285	330	340	UF-340	18
19	160	170	UF-170	175	185	UF-185	245	255	UF-255	290	300	UF-300	350	360	UF-360	19
20	170	180	UF-180	185	195	UF-195	255	265	UF-265	305	315	UF-315	365	375	UF-375	20
21	175	185	UF-185	195	205	UF-205	270	280	UF-280	320	330	UF-330	385	395	UF-395	21
22	185	195	UF-195	200	210	UF-210	280	290	UF-290	335	345	UF-345	400	410	UF-410	22
23	190	200	UF-200	210	220	UF-220	290	300	UF-300	350	360	UF-360	420	430	UF-430	23
24	195	205	UF-205	215	225	UF-225	305	315	UF-315	360	370	UF-370	435	445	UF-445	24
25	205	215	UF-215	225	235	UF-235	315	325	UF-325	375	385	UF-385	450	460	UF-460	25
26	210	220	UF-220	235	245	UF-245	325	335	UF-335	390	400	UF-400	470	480	UF-480	26
27	220	230	UF-230	240	250	UF-250	340	350	UF-350	405	415	UF-415	485	495	UF-495	27
28	225	235	UF-235	250	260	UF-260	350	360	UF-360	420	430	UF-430	505	515	UF-515	28
29	230	240	UF-240	255	265	UF-265	360	370	UF-370	435	445	UF-445	520	530	UF-530	29
30	240	250	UF-250	265	275	UF-275	370	380	UF-380	445	455	UF-455	535	545	UF-545	30
31	245	255	UF-255	275	285	UF-285	385	395	UF-395	460	470	UF-470	555	565	UF-565	31
32	255	265	UF-265	280	290	UF-290	395	405	UF-405	475	485	UF-485	570	580	UF-580	32
33	260	270	UF-270	290	300	UF-300	410	420	UF-420	490	500	UF-500	590	600	UF-600	33
34	265	275	UF-275	295	305	UF-305	420	430	UF-430	500	510	UF-510				34
35	275	285	UF-285	305	315	UF-315	430	440	UF-440	520	530	UF-530				35
36	280	290	UF-290	315	325	UF-325	440	450	UF-450	530	540	UF-540				36
37	290	300	UF-300	320	330	UF-330	455	465	UF-465	545	555	UF-555				37
38	295	305	UF-305	330	340	UF-340	465	475	UF-475	560	570	UF-570				38
39	300	310	UF-310	335	345	UF-345	475	485	UF-485	570	580	UF-580				39
40	310	320	UF-320	345	355	UF-355	490	500	UF-500	590	600	UF-600				40
41	315	325	UF-325	355	365	UF-365	500	510	UF-510							41
42	325	335	UF-335	360	370	UF-370	510	520	UF-520							42
43	330	340	UF-340	370	380	UF-380	525	535	UF-535							43
44	340	350	UF-350	380	390	UF-390	535	545	UF-545							44
45	345	355	UF-355	385	395	UF-395	545	555	UF-555							45
46	350	360	UF-360	395	405	UF-405	560	570	UF-570							46
47	360	370	UF-370	400	410	UF-410	570	580	UF-580							47
48	365	375	UF-375	410	420	UF-420	580	590	UF-590							48
49	375	385	UF-385	420	430	UF-430										49
50	380	390	UF-390	425	435	UF-435										50
51	385	395	UF-395	435	445	UF-445										51
52	395	405	UF-405	440	450	UF-450										52
53	400	410	UF-410	450	460	UF-460										53
54	410	420	UF-420	460	470	UF-470										54
55	415	425	UF-425	465	475	UF-475										55
56	420	430	UF-430	475	485	UF-485										56
57	430	440	UF-440	480	490	UF-490										57
58	435	445	UF-445	490	500	UF-500										58
59	445	455	UF-455	500	510	UF-510										59
60	450	460	UF-460	505	515	UF-515										60

*Rail designation is UF-pole for TUB-F type (U cut rail).

CONNECTING DEVICES

A SWITCH

B PILOT LAMP & INDICATOR

C CONNECTING DEVICES

D ELECTRONIC DEVICES

Type Pole	TU-80			TU-125			TU-150			TU-250			TU-400B			Type Pole
	P	L	Rail	P	L	Rail	P	L	Rail	P	L	Rail	P	L	Rail	
1	45	55	UF-55	50	60	UF-60	55	65	UF-65	65	75	UF-75	75	85	UF-85	1
2	65	75	UF-75	75	85	UF-85	85	95	UF-95	110	120	UF-120	135	145	UF-145	2
3	85	95	UF-95	100	110	UF-110	115	125	UF-125	160	170	UF-170	190	200	UF-200	3
4	105	115	UF-115	125	135	UF-135	145	155	UF-155	205	215	UF-215	250	260	UF-260	4
5	125	135	UF-135	150	160	UF-160	175	185	UF-185	255	265	UF-265	310	320	UF-320	5
6	145	155	UF-155	175	185	UF-185	205	215	UF-215	300	310	UF-310	365	375	UF-375	6
7	165	175	UF-175	200	210	UF-210	235	245	UF-245	350	360	UF-360	425	435	UF-435	7
8	185	195	UF-195	230	240	UF-240	265	275	UF-275	395	405	UF-405	485	495	UF-495	8
9	205	215	UF-215	255	265	UF-265	295	305	UF-305	440	450	UF-450	540	550	UF-550	9
10	225	235	UF-235	280	290	UF-290	325	335	UF-335	490	500	UF-500				10
11	245	255	UF-255	305	315	UF-315	355	365	UF-365	535	545	UF-545				11
12	265	275	UF-275	330	340	UF-340	385	395	UF-395	585	595	UF-595				12
13	285	295	UF-295	355	365	UF-365	415	425	UF-425							13
14	305	315	UF-315	380	390	UF-390	445	455	UF-455							14
15	325	335	UF-335	405	415	UF-415	475	485	UF-485							15
16	345	355	UF-355	430	440	UF-440	505	515	UF-515							16
17	365	375	UF-375	455	465	UF-465	535	545	UF-545							17
18	385	395	UF-395	485	495	UF-495	565	575	UF-575							18
19	405	415	UF-415	510	520	UF-520										19
20	425	435	UF-435	535	545	UF-545										20
21	445	455	UF-455	560	570	UF-570										21
22	465	475	UF-475	585	595	UF-595										22
23	485	495	UF-495													23
24	505	515	UF-515													24
25	525	535	UF-535													25
26	545	555	UF-555													26
27	565	575	UF-575													27
28	585	595	UF-595													28

*When the TU-400B is equipped with the TUC-60 cover, the maximum number of terminals that can be assembled is 7.

Type Pole	TU-600B															Type Pole
	P	L	Rail													
1	75	85	UF-85													1
2	155	165	UF-165													2
3	240	250	UF-250													3
4	320	330	UF-330													4
5	400	410	UF-410													5
6	480	490	UF-490													6
7	565	575	UF-575													7

*Rail designation is UF-[pole] for TUB-F type (U cut rail).



SCREW TYPE TERMINAL BLOCK


TU TYPE

ACCESSORIES

LIST OF APPLICABLE ACCESSORIES

Accessory <	
--	--

CONNECTING DEVICES

Aluminum rail		End clamp		Cover	Jumper	Accessory		
						Type		
Applicable	Semi-applicable	Applicable	Semi-applicable					
TUB	—	TUL	—	TUC-2, TUC-2-V0	—	TU-10		TU TYPE
	—		—		SB8RCB, SB8CB	TU-15		
	—		—	TUC-3, TUC-3-V0		TU-15C		
	—		—	TUC-2, TUC-2-V0	SB11.5CB	TU-20		
	—		—	TUC-2, TUC-2-V0		TU-20BU		
	—		—	TUC-3, TUC-3-V0		TU-30B		
	—		—			TU-30BR		
	—		—	TUC-6, TUC-6-V0	SB14CB	TU-50		
	—		TUL-W		—	TU-60		
	—			TUC-8, TUC-8-V0	—	TU-80		
	TXB, TKB	TXL, TJL TUL-W	—	TUC-15, TUC-15-V0	—	TU-125		
				—	TU-150			
				TUC-25, TUC-25-V0	—	TU-250		
				TUC-40 1M, TUC-60, TUC-40 1M-V0	—	TU-400B		
			TUC-40 1M, TUC-60, TUC-40 1M-V0	—	TU-600B			
			—	—	TUC-2, TUC-2-V0	SB8RCB, SB8CB	TUS-15	
	—	—	TUP-15					
	—	—	—	SB11.5CB		TU-FS		
	—	—	—					

A SWITCH

B PILOT LAMP & INDICATOR

C CONNECTING DEVICES


D ELECTRONIC DEVICES




End clamp

(Order unit: 50)


●TUL (for TUB)




●TUL-W (for TUB)



●TXL (for TXB)



●TJL (for TXB)



Cover


(Order unit: 20)



Type name	TUC-2 TUC-2-V0	TUC-3 TUC-3-V0	TUC-6 TUC-6-V0	TUC-8 TUC-8-V0	TUC-15 TUC-15-V0	TUC-25 TUC-25-V0	TUC-40 TUC-40-V0	TUC-40 1M TUC-40 1M-V0
A	35	40	45	50	62	80	80	80
B	1,000	1,000	1,000	1,000	1,000	45	55	1,000
C	5.6	5.6	5.6	7	7.5	7.5	7.5	7.5

* The end "V0" is a flame retardant grade UL94V-0 specification product.

●TUC-60



Long cover for terminal block and crimp terminal.
When attach the TUC-60 cover, it's necessary to open a space by TU-600B pin.

Jumper

(Order unit: 10)

With insulation coat	2 poles	SB8CB-2 (TU-15 SbarC-B 2P)	SB8RCB-2	SB11.5CB-2 (TU-20 SbarC-B 2P)	SB12CB-2 (TU-30S SbarC-B 2P)	SB14CB-2 (TCS-14 SB14CB-2)
	12 poles	SB8CB-12 (TU-15 SbarC-B 12P)	SB8RCB-12	SB11.5CB-12 (TU-20 SbarC-B 12P)	SB12CB-12 (TU-30S SbarC-B 12P)	SB14CB-12 (TCS-14 SB14CB-12)
Dimensions						

* For pole counts other than those listed above, please contact us.

Name plate mount

(Order unit: 50)

●TX NP mount S



* The NP mount can be attached to TXL (end clamp).

●TX NP mount lens




(Assembled state)


Rail cap

(Order unit: 100)

●Cap for DIN rail TXB CAP-PVC



●Cap for DIN rail (High-strength type) TKB CAP-PVC



●Cap for Fuji exclusive rail TUB CAP-PVC



* Only single product sale.